


Advantage Flush System (AFS)



- Remove carryover oil and accumulated contaminants in engine crankcases
- Increase engine efficiency
- Extend engine life

Typical results at 100 miles

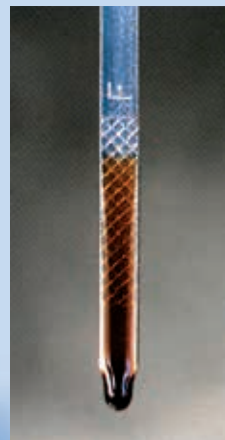

After regular
oil change



After an oil
change and
Advantage
Flush Service

Advantage Flush System (AFS)

Features:

- CAD designed
- High quality components and construction
- High flow rate
- Easy to use
- Comprehensive control panel (heater time set, alarm list)
- Storage for optional canister adapters and tools

Specifications:

- Steel powder coated cabinet with built in handle
- 8" rigid wheels (rear), 3-1/2" swivel and brake lock wheels (front)
- 17' external hoses
- 4 line, 20 character display
- Electric Diaphragm Pump (pressure)
- Electric Diaphragm Pump (recovery)
- 15 U.S. gallon corrosion resistant solution tank
- Up to 3.2 U.S. gallons/minute flow rate
- Filtration: 3 micron external and 3 micron internal
- Electrical requirement: 100/240 VAC, 50/60 Hz, 14.5/6.9 amps
- Power Supply: 24 VDC, 2.0 amps
- Two (2) year limited warranty

**Use Advantage
Engineering Chemicals
for Optimum Results**



Weight: 150 lbs. (68 kgs.)
Dimensions: 22.5" (57 cm) wide
26.5" (67 cm) deep
47.5" (121 cm) high

UL, CUL, and CE accreditations pending

Specifications and features subject to change without notice.



AEC GROUP INC. 3600 W. Carriage Drive, Santa Ana, CA 92704
Toll-Free: 877-906-1395 • Phone: 714-444-1395 • Fax: 714-444-1396 • www.aecgroup.net